

For medium to smaller air flow volumes against high resistances.


Specifically made for in-duct installation. High pressure characteristic to overcome resistances of bends, filters etc. Universal in application for domestic, commercial and industrial purposes.

Special features

- Less space required and simple site installation of the compact in line design.
- Its simplicity reduces site costs.
- Supply and exhaust air spigots fit all standard circular duct sizes.
- Power adjustment by 100% variable speed control.
- Installation in any position.
- Wide range of accessories.
- Aerodynamically optimized casing design.


Common features

- Motor**
Closed, ball bearing-mounted external rotor motor with humidity protection, insulation class F, for continuous operation, maintenance free and interference-free.
- Motor protection**
Automatically switches off and on again after cooling due to built-in thermal contacts with the winding wired in series.
- Installation**
Can be mounted in any position – horizontal, vertical or diagonal – suitable for supply and extract ventilation by correct installation. To minimise the effective noise level it is recommended that the fan is installed as remote as possible from the ventilated space.
- Sound levels**
See page 333.

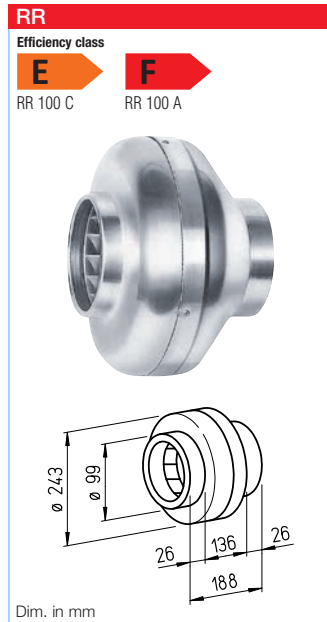


Specification RR

- Casing**
Robust casing from galvanised sheet steel for harsh operating conditions. Intake and exhaust Spigots on intake and exhaust fit standard ducts.
- Speed control**
Type RR 100 A from 0 – 100 % possible by means of electronic controller or step transformer (see table). For Type RR 100 C additional two-speed operation using Type DS 2/2 (accessories). **Type DS 2/2** Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
When installed in intake and exhaust ducting and rainwater penetration is prevented, the fan is rated IP 44.

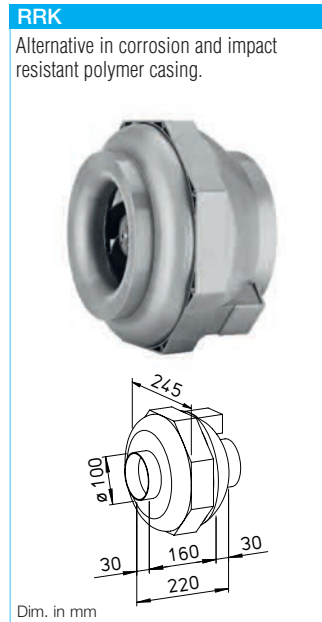

Specification RRK

- Casing**
All components made from corrosion and impact resistant polymer. Six built-in guide vanes also increase the level of efficiency. Colour: Silver-grey.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
IP 44

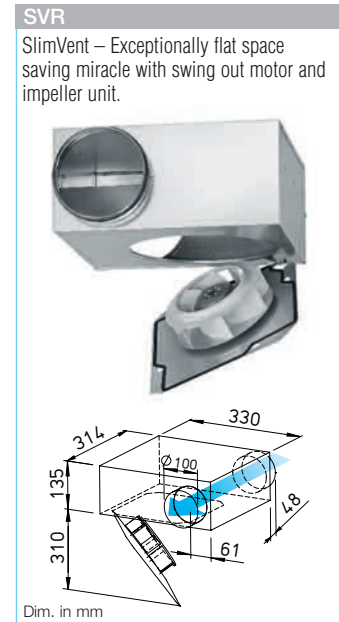

Specification SVR

- Casing**
Flat and robust casing from galvanised sheet steel. Spigots on intake and extract with twin-seal rubber gaskets fit into standard ducts. Particularly service-friendly (cleaning) through swing out motor and impeller unit without disassembly of system components. Space for the swing out facility must be considered.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table) or two-speed operation with Type DS 2/2 (accessories). **Type DS 2/2** Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) fitted to running cable.
- Impeller**
Energy-saving centrifugal impeller with forward curved blades. Dynamically balanced for low noise operation.
- Protection class**
When installed in ducting IP 44.

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Power consumption	Current		Wiring diagram	max. air flow temp.		Weight net approx.	Transformer-speed controller 5-step		Electronic* speed controller, stepless flush / surface	
						full load	control		full load	control		Type	Ref. no.	Type	Ref. no.
Type RR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44															
RR 100 A	5653	250	1730	36	41	0.18	0.18	508	60	60	2.9	TSW 0,3	3608	ESU 1 / ESA 1	0236 / 0238
RR 100 C ¹⁾	5654	330 ¹⁾ /220	2530 ¹⁾ /1655	42	62 ¹⁾ /40	0.27 ¹⁾ /0.18	0.27	934.1	60	60	2.9	TSW 0,3	3608	ESU 1 / ESA 1	0236 / 0238
Type RRK, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44															
RRK 100	5973	260	2250	45	33	0.14	0.14	508	70	60	2.4	TSW 0,3	3608	ESU 1 / ESA 1	0236 / 0238
Type SVR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 33															
SVR 100 C ²⁾	2658	310/245 ²⁾	2600/1940 ²⁾	45/40 ²⁾	58/40 ²⁾	0.25/0.18 ²⁾	0.23	934.1	60	60	4.8	TSW 1,5	1495	ESU 1 / ESA 1	0236 / 0238


¹⁾ Type with high speed; standard with additional energy-saving speed level (see performance diagram).

²⁾ Values are related to the 2 speeds (see performance diagram).

* In noise relevant cases transformer controller must be provided. An electronic controller can trigger a distracting magnetisation noise.


RR 100 A

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A)	43	21	33	35	39	37	31
L _{WA} Intake		dB(A)	66	56	64	60	58	52	45

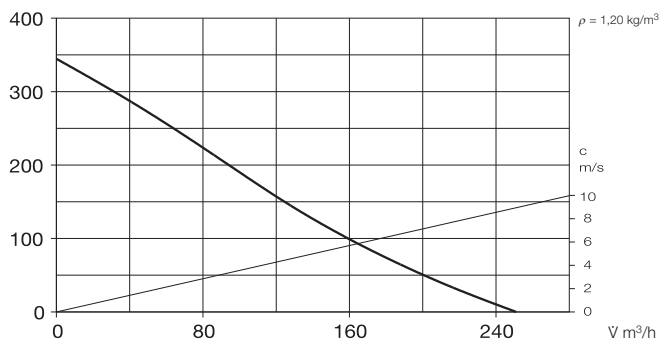


RR 100 C

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A)	49	23	40	40	44	42	44
L _{WA} Intake		dB(A)	70	61	66	65	65	59	52

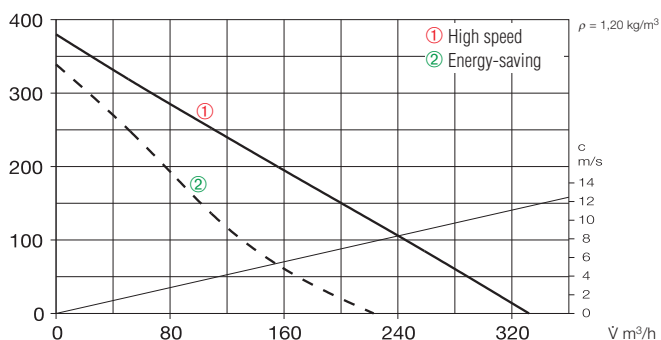


RRK 100

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A)	52	37	45	45	48	46	36
L _{WA} Intake		dB(A)	61	39	51	58	55	53	48

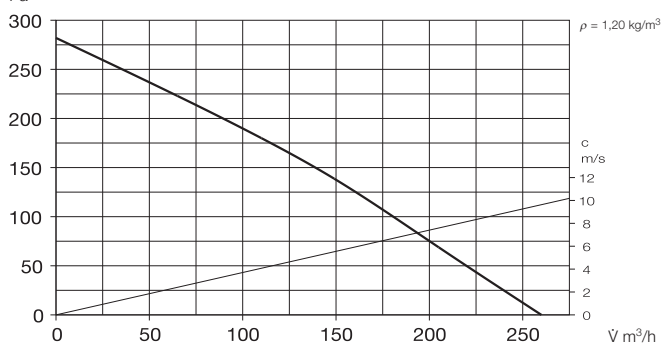

SVR 100 C


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A)	53	37	50	49	44	41	35
L _{WA} Intake		dB(A)	67	60	61	64	57	55	49
L _{WA} Exhaust		dB(A)	70	60	63	66	64	60	54

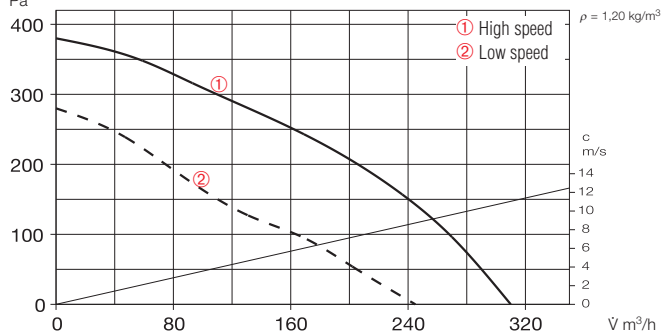

Accessories

Pipe clamp connectors

Type BM 100 Ref. no. 5075
A quick-fix method for connecting fans to ducting, reducing vibration transmission (1 kit = 2 pieces). When installing leave a little gap between fan and ducting.



Mounting feet for RR

Type MK 4 Ref. no. 5824

Mounting feet for RRK

Type MK 1 Ref. no. 5821


Made from galvanised steel sheet.



Gravity shutter

Type VK 100 Ref. no. 0757

Automatic made from white polymer.



Rain repellent grille

Type G 100 Ref. no. 0796

Made from white polymer.



Guard

Type SGR 100 Ref. no. 5063

For intake and exhaust installation on fan, made from powder-coated steel wire.



Backdraught shutter

Type RSKK 100 Ref. no. 5106

Automatic, made from polymer.



Flexible attenuator

Type FSD 100 Ref. no. 0676

Spigotted aluminium attenuator with 50 mm insulation. Length 1 m.



Air filter box

LFBR 100 G4 Ref. no. 8576

LFBR 100 F7 Ref. no. 8530

Air filter with large surface area to be installed in-line with ducting.



Electric heater batteries

EHR-R 0,4/100 0,4 kW No. 8708

In galvanised steel sheet casing.



Temperature control system for electric heater batteries EHR-R

Type EHS Ref. no. 5002



Warm water heater battery

Type WHR 100 Ref. no. 9479

Compact heat exchanger for in-line installation.



Temperature control system for warm water heater battery

Type WHST 300 T38 No. 8817



For medium to smaller air flow volumes against high resistances.


Specifically made for in-duct installation. High pressure characteristic to overcome resistances of bends, filters etc. Universal in application for domestic, commercial and industrial purposes.

Special features

- Less space required and simple site installation of the compact in line design.
- Its simplicity reduces site costs.
- Supply and exhaust air spigots fit all standard circular duct sizes.
- Power adjustment by 100% variable speed control.
- Installation in any position.
- Wide range of accessories.
- Aerodynamically optimized casing design.

Common features


- Motor**
Closed, ball bearing-mounted external rotor motor with humidity protection, insulation class F, for continuous operation, maintenance free and interference-free.
- Motor protection**
Automatically switches off and on again after cooling due to built-in thermal contacts with the winding wired in series.
- Installation**
Can be mounted in any position – horizontal, vertical or diagonal – suitable for supply and extract ventilation by correct installation. To minimise the effective noise level it is recommended that the fan is installed as remote as possible from the ventilated space.

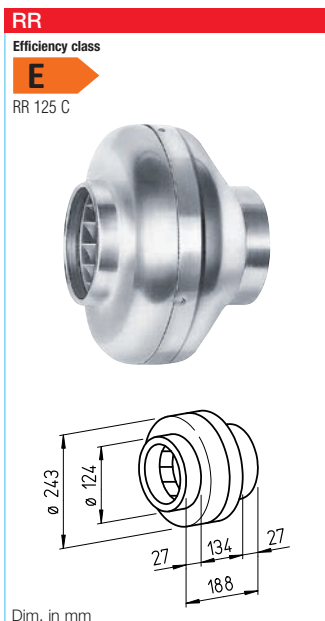

Dim. in mm

Specification RR


- Casing**
Robust casing from galvanised sheet steel for harsh operating conditions. Intake and exhaust Spigots on intake and exhaust fit standard ducts.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table) or two-speed operation with Type DS 2/2 (accessories).
Type DS 2/2 Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
When installed in intake and exhaust ducting and rainwater penetration is prevented, the fan is rated IP 44.

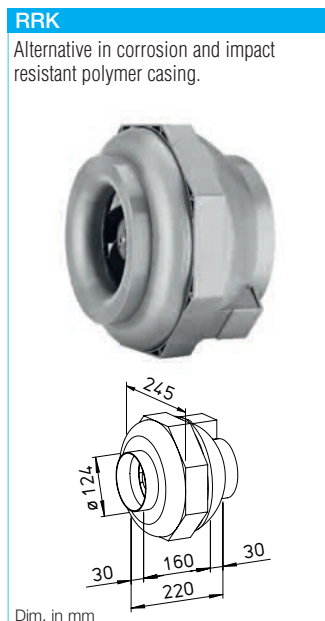

Dim. in mm

Specification RRK

- Casing**
All components made from corrosion and impact resistant polymer. Six built-in guide vanes also increase the level of efficiency. Colour: Silver-grey.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
IP 44

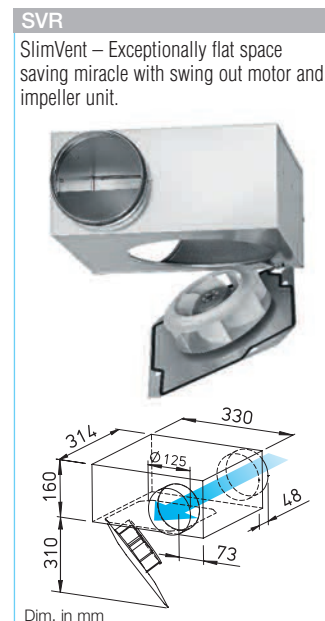

Dim. in mm

Specification SVR

- Casing**
Flat and robust casing from galvanised sheet steel. Spigots on intake and extract with twin-seal rubber gaskets fit into standard ducts. Particularly service-friendly (cleaning) through swing out motor and impeller unit without disassembly of system components. Space for the swing out facility must be considered.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table) or two-speed operation with Type DS 2/2 (accessories).
Type DS 2/2 Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) fitted to running cable.
- Impeller**
Energy-saving centrifugal impeller with forward curved blades. Dynamically balanced for low noise operation.
- Protection class**
When installed in ducting IP 44.


Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Power consumption	Current full load	Current control	Wiring diagram	max. air flow temp. full load	control	Weight net approx.	Transformer-speed controller 5-step	Electronic* speed controller, stepless flush / surface	
		V m ³ /h	min ⁻¹	db(A) in 1 m	W	A	A	No.	+°C	+°C	kg	Type	Ref. no.	Type
Type RR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44														
RR 125 C ¹⁾	5655	480 ¹⁾ /310	2480 ¹⁾ /1655	42	62 ¹⁾ /40	0.27 ¹⁾ /0.18	0.27	934.1	70	70	2.9	TSW 0,3	3608	ESU 1 / ESA 1 0236 / 0238
Type RRK, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44														
RRK 125	5974	330	2415	48	65	0,30	0.30	508	70	60	3.1	TSW 0,3	3608	ESU 1 / ESA 1 0236 / 0238
Type SVR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 33														
SVR 125 B ²⁾	2671	400/290 ²⁾	2570/1810 ²⁾	46/38 ²⁾	59/41 ²⁾	0.26/0.18 ²⁾	0.24	934.1	60	60	5.1	TSW 1,5	1495	ESU 1 / ESA 1 0236 / 0238

¹⁾ Type with high speed; standard with additional energy-saving speed level (see performance diagram).


²⁾ Values are related to the 2 speeds (see performance diagram).

* In noise relevant cases transformer controller must be provided. An electronic controller can trigger a distracting magnetisation noise.


RR 125 C

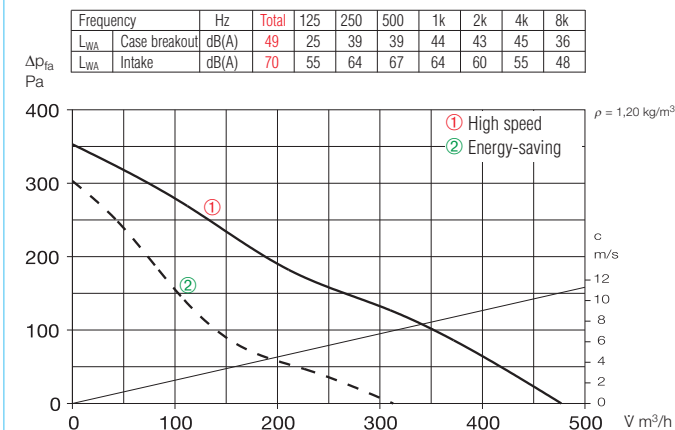

RRK 125

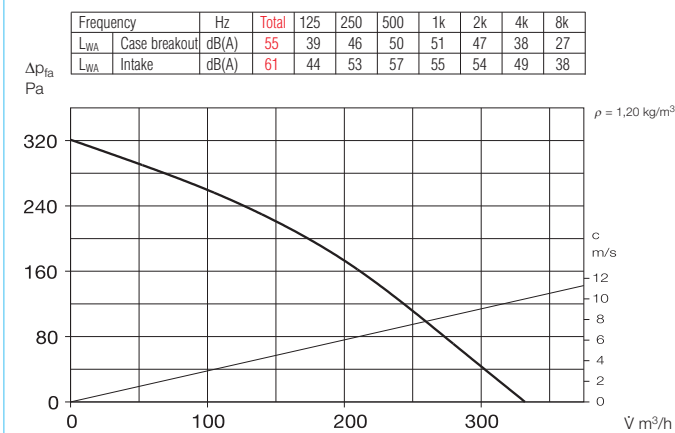

SVR 125 B

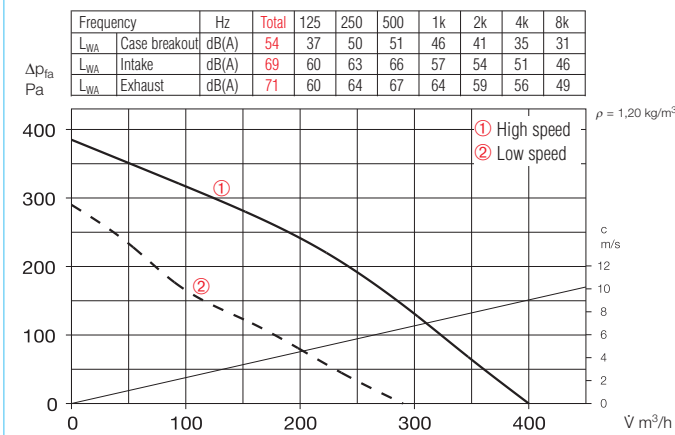

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for

- Sound level case breakout
- Sound level intake/exhaust

In addition, the case breakout and intake air noise figures are given as sound pressure levels at 1 metre (free field conditions) in the technical data table (see left page).

Note

Page
Techn. description
Selection chart
Information for planning
Modular system


Accessory details

Page
Filters, heater batteries and attenuators
Temperature control systems for heater batteries
Flexible ventilation ducting, grilles, adaptors, roof terminations
Poppet valves
Speed controllers and switches

Accessories

Pipe clamp connectors

Type BM 125 Ref. no. 5076
A quick-fix method for connecting fans to ducting, reducing vibration transmission (1 kit = 2 pieces). When installing leave a little gap between fan and ducting.



Mounting feet for RR

Type MK 4 Ref. no. 5824

Mounting feet for RRK

Type MK 1 Ref. no. 5821

Made from galvanised steel sheet.



Gravity shutter

Type VK 125 Ref. no. 0857

Automatic made from white polymer.



Rain repellent grille

Type G 160 Ref. no. 0893

Made from white polymer.



Guard

Type SGR 125 Ref. no. 5064

For intake and exhaust installation on fan, made from powder-coated steel wire.



Backdraught shutter

Type RSKK 125 Ref. no. 5107

Automatic, made from polymer.



Flexible attenuator

Type FSD 125 Ref. no. 0677

Spigotted aluminium attenuator with 50 mm insulation. Length 1 m.



Air filter box

LFBR 125 G4 Ref. no. 8577

LFBR 125 F7 Ref. no. 8531

Air filter with large surface area to be installed in-line with ducting.



Electric heater batteries

EHR-R 0,8/125 0,8 kW No. 8709

EHR-R 1,2/125 1,2 kW No. 9433

- with integrated temp. control

EHR-R 0,8/125 TR 0,8 kW No. 5293

Room or duct sensor required (TFK/TFR, accessory).



Temperature control system for electric heater batteries EHR-R


Type EHS Ref. no. 5002



Warm water heater battery

Type WHR 125 Ref. no. 9480

Compact heat exchanger for in-line installation.



Temperature control system for warm water heater battery

Type WHST 300 T38 No. 8817



For medium to smaller air flow volumes against high resistances.


Specifically made for in-duct installation. High pressure characteristic to overcome resistances of bends, filters etc. Universal in application for domestic, commercial and industrial purposes.

Special features

- Less space required and simple site installation of the compact in line design.
- Its simplicity reduces site costs.
- Supply and exhaust air spigots fit all standard circular duct sizes.
- Power adjustment by 100% variable speed control.
- Installation in any position.
- Wide range of accessories.
- Aerodynamically optimized casing design.


Common features

- Motor**
Closed, ball bearing-mounted external rotor motor with humidity protection, insulation class F, for continuous operation, maintenance free and interference-free.
- Motor protection**
Automatically switches off and on again after cooling due to built-in thermal contacts with the winding wired in series.
- Installation**
Can be mounted in any position – horizontal, vertical or diagonal – suitable for supply and extract ventilation by correct installation. To minimise the effective noise level it is recommended that the fan is installed as remote as possible from the ventilated space.
- Sound levels**
See page 333.

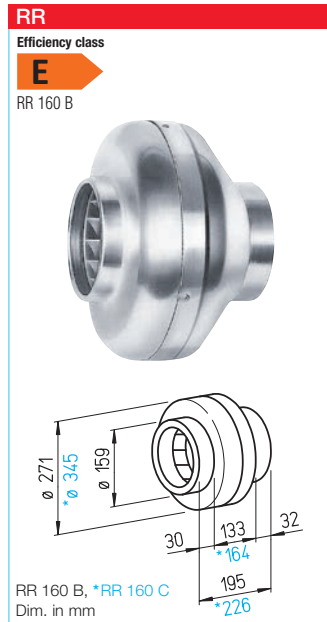


Specification RR

- Casing**
Robust casing from galvanised sheet steel for harsh operating conditions. Intake and exhaust Spigots on intake and exhaust fit standard ducts.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table) or two-speed operation with Type DS 2/2 (accessories).
Type DS 2/2 Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
When installed in intake and exhaust ducting and rainwater penetration is prevented, the fan is rated IP 44.

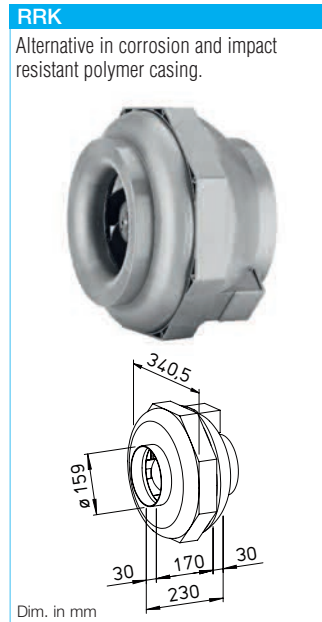

Specification RRK

- Casing**
All components made from corrosion and impact resistant polymer. Six built-in guide vanes also increase the level of efficiency. Colour: Silver-grey.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
IP 44

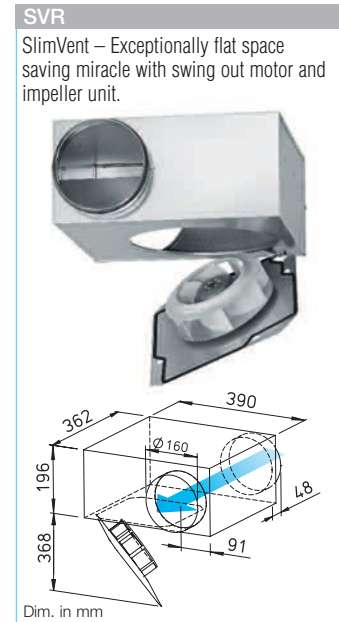

Specification SVR

- Casing**
Flat and robust casing from galvanised sheet steel. Spigots on intake and extract with twin-seal rubber gaskets fit into standard ducts. Particularly service-friendly (cleaning) through swing out motor and impeller unit without disassembly of system components. Space for the swing out facility must be considered.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table) or two-speed operation with Type DS 2/2 (accessories).
Type DS 2/2 Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) fitted to running cable.
- Impeller**
Energy-saving centrifugal impeller with forward curved blades. Dynamically balanced for low noise operation.
- Protection class**
When installed in ducting IP 44.

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Power consumption	Current		Wiring diagram	max. air flow temp.		Weight net approx.	Transformer-speed controller 5-step		Electronic* speed controller, stepless flush / surface	
						full load	control		full load	control		Type	Ref. no.	Type	Ref. no.
Type RR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44															
RR 160 B ¹⁾	5656	530 ¹⁾ /370	2540 ¹⁾ /1695	42	62 ¹⁾ /40	0.27 ¹⁾ /0.18	0.27	934.1	60	60	3.2	TSW 0,3	3608	ESU 1 / ESA 1	0236 / 0238
RR 160 C ¹⁾	5657	870 ¹⁾ /610	2480 ¹⁾ /1580	49	101 ¹⁾ /64	0.44 ¹⁾ /0.28	0.44	934.1	65	65	4.3	TSW 1,5	1495	ESU 1 / ESA 1	0236 / 0238
Type RRK, 1 phase motor, 230 V, 50 Hz, 1 phase motor, IP 44															
RRK 160	5976	430	2400	46	70	0.30	0.30	508	70	50	3.4	TSW 0,3	3608	ESU 1 / ESA 1	0236 / 0238
Type SVR, 1 phase motor, 230 V, 50 Hz, 1 phase motor, IP 33															
SVR 160 K ²⁾	2672	450/310 ²⁾	2550/1740 ²⁾	45/37 ²⁾	61/42 ²⁾	0.26/0.19 ²⁾	0.25	934.1	60	60	6.7	TSW 1,5	1495	ESU 1 / ESA 1	0236 / 0238


¹⁾ Type with high speed; standard with additional energy-saving speed level (see performance diagram).

²⁾ Values are related to the 2 speeds (see performance diagram).

* In noise relevant cases transformer controller must be provided. An electronic controller can trigger a distracting magnetisation noise.


RR 160 B

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 49	24	39	40	45	44	44	32
L _{WA} Intake		dB(A) 69	54	64	65	63	58	53	48

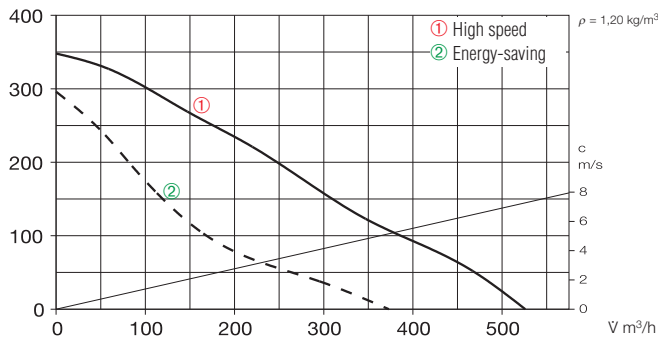


RR 160 C

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 56	34	42	49	54	47	48	35
L _{WA} Intake		dB(A) 73	60	64	68	69	64	64	54

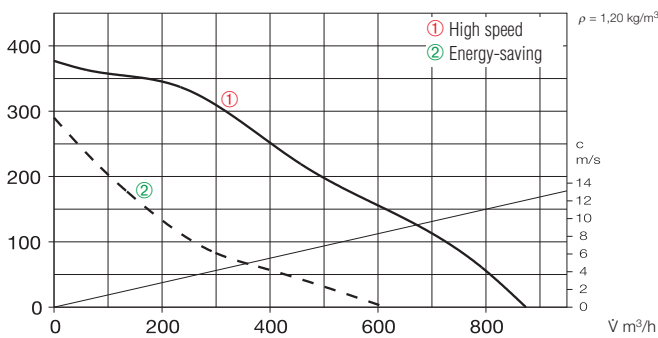


RRK 160

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 53	31	40	47	49	47	38	26
L _{WA} Intake		dB(A) 59	42	50	53	54	52	49	38

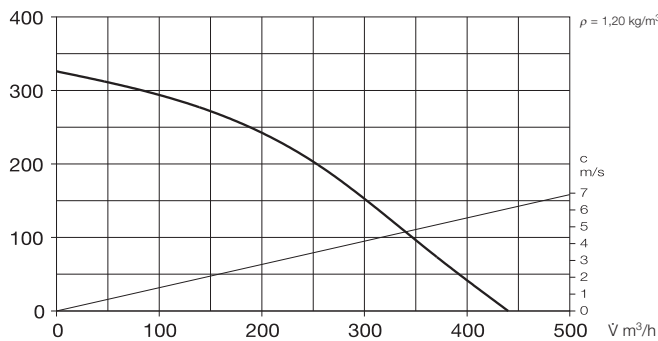

SVR 160 K


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 53	39	48	50	41	39	34	31
L _{WA} Intake		dB(A) 68	59	65	62	57	51	52	45
L _{WA} Exhaust		dB(A) 70	59	65	66	60	56	55	47

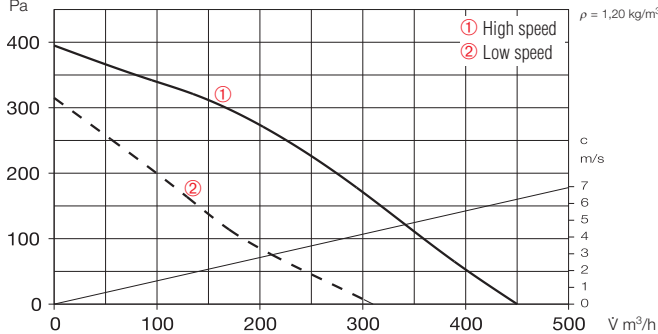

Accessories

Pipe clamp connectors

Type BM 160 Ref. no. 5077
A quick-fix method for connecting fans to ducting, reducing vibration transmission (1 kit = 2 pieces). When installing leave a little gap between fan and ducting.



Mounting feet for RR

Type MK 4 Ref. no. 5824

Mounting feet for RRK

Type MK 2 Ref. no. 5822


Made from galvanised steel sheet.



Gravity shutter

Type VK 160 Ref. no. 0892

Automatic made from white polymer.



Rain repellent grille

Type G 160 Ref. no. 0893

Made from white polymer.

Guard

Type SGR 160 Ref. no. 5069

For intake and exhaust installation on fan, made from galvanised steel.



Backdraught shutter

Type RSK 160 Ref. no. 5669

Automatic, made from metal.



Flexible attenuator

Type FSD 160 Ref. no. 0678

Spigotted aluminium attenuator with 50 mm insulation. Length 1 m.

Air filter box

LFBR 160 G4 Ref. no. 8578

LFBR 160 F7 Ref. no. 8532

Air filter with large surface area to be installed in-line with ducting.



Electric heater batteries

EHR-R 1,2/160 1,2 kW No. 9434

EHR-R 2,4/160 2,4 kW No. 9435

EHR-R 5/160 5,0 kW No. 8710

– with integrated temp. control

EHR-R 2,4/160 TR 2,4 kW No. 5294

Room or duct sensor required (TFK/TFR, accessory).



Temperature control system for electric heater batteries EHR-R


Type EHS Ref. no. 5002



Warm water heater battery

Type WHR 160 Ref. no. 9481

Compact heat exchanger for in-line installation.



Temperature control system for warm water heater battery

Type WHST 300 T38 No. 8817



For medium to smaller air flow volumes against high resistances.

Specifically made for in-duct installation. High pressure characteristic to overcome resistances of bends, filters etc. Universal in application for domestic, commercial and industrial purposes.

Special features


- Less space required and simple site installation of the compact in line design.
- Its simplicity reduces site costs.
- Supply and exhaust air spigots fit all standard circular duct sizes.
- Power adjustment by 100% variable speed control.
- Installation in any position.
- Wide range of accessories.
- Aerodynamically optimized casing design.

Common features

- Motor**
Closed, ball bearing-mounted external rotor motor with humidity protection, insulation class F, for continuous operation, maintenance free and interference-free.
- Motor protection**
Automatically switches off and on again after cooling due to built-in thermal contacts with the winding wired in series.
- Installation**
Can be mounted in any position – horizontal, vertical or diagonal – suitable for supply and extract ventilation by correct installation. To minimise the effective noise level it is recommended that the fan is installed as remote as possible from the ventilated space.
- Sound levels**
See page 333.

RR

Market-leading series offering excellent value for money.
With energy saving mode as standard.

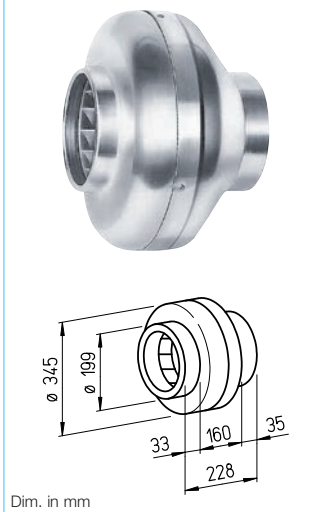


Specification RR

- Casing**
Robust casing from galvanised sheet steel for harsh operating conditions. Intake and exhaust Spigots on intake and exhaust fit standard ducts.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
Two-speed operation possible for Type RR 200 A using Type DS 2/2 (accessories).
Type DS 2/2 Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
When installed in intake and exhaust ducting and rainwater penetration is prevented, the fan is rated IP 44.

RRK

Alternative in corrosion and impact resistant polymer casing.

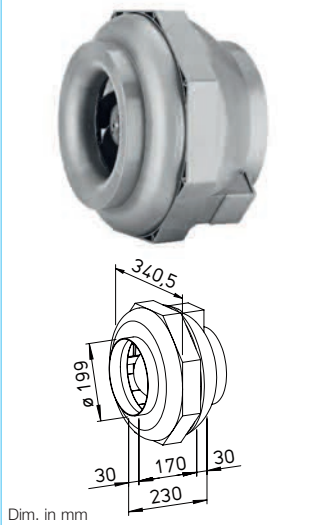


Specification RRK

- Casing**
All components made from corrosion and impact resistant polymer. Six built-in guide vanes also increase the level of efficiency. Colour: Silver-grey.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
IP 44

SVR

SlimVent – Exceptionally flat space saving miracle with swing out motor and impeller unit.

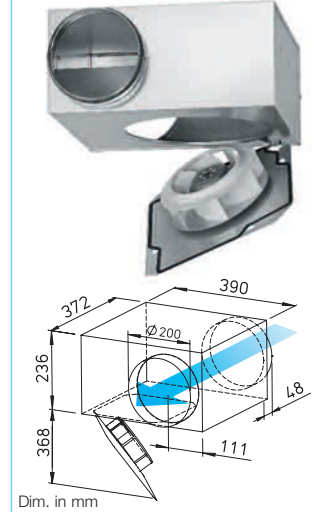

Specification SVR

- Casing**
Flat and robust casing from galvanised sheet steel. Spigots on intake and extract with twin-seal rubber gaskets fit into standard ducts. Particularly service-friendly (cleaning) through swing out motor and impeller unit without disassembly of system components. Space for the swing out facility must be considered.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) fitted to running cable.
- Impeller**
Energy-saving centrifugal impeller with forward curved blades. Dynamically balanced for low noise operation.
- Protection class**
When installed in ducting IP 44.


Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Power consumption	Current full load	Current control	Wiring diagram	max. air flow temp. full load	max. air flow temp. control	Weight net approx.	Transformer-speed controller 5-step	Electronic* speed controller, stepless flush / surface
		V m³/h	min⁻¹	db(A) in 1 m	W	A	A	No.	+°C	+°C	kg	Type Ref. no.	Type Ref. no.
Type RR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44 (Type RR 200 B, IP 33)													
RR 200 A ¹⁾	5658	930 ¹⁾ /760	2580 ¹⁾ /1830	47	115 ¹⁾ /85	0.51 ¹⁾ /0.39	0.51	934.1	60	60	4.6	TSW 1,5 1495	ESU 1 / ESA 1 0236 / 0238
RR 200 B	5659	980	2750	44	145	0.63	0.78	508	70	60	5.0	TSW 1,5 1495	ESU 1 / ESA 1 0236 / 0238
Type RRK, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44													
RRK 200	5977	780	2395	56	115	0.50	0.50	508	60	50	3.6	TSW 1,5 1495	ESU 1 / ESA 1 0236 / 0238
Type SVR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 33													
SVR 200 K	2673	980	2730	57	154	0.67	0.81	508	70	50	8.4	TSW 1,5 1495	ESU 1 / ESA 1 0236 / 0238

¹⁾ Type with high speed; standard with additional energy-saving speed level (see performance diagram).

* In noise relevant cases transformer controller must be provided. An electronic controller can trigger a distracting magnetisation noise.


RR 200 A

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 54	31	42	46	50	47	48	34
L _{WA} Intake		dB(A) 72	60	64	67	66	64	65	55

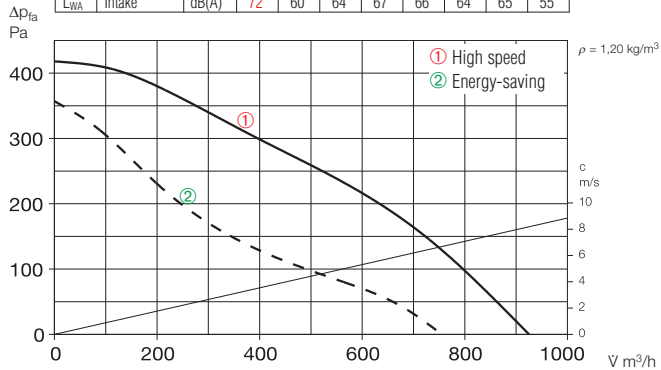


RR 200 B

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 52	34	41	46	48	44	44	35
L _{WA} Intake		dB(A) 74	62	67	69	66	63	62	57

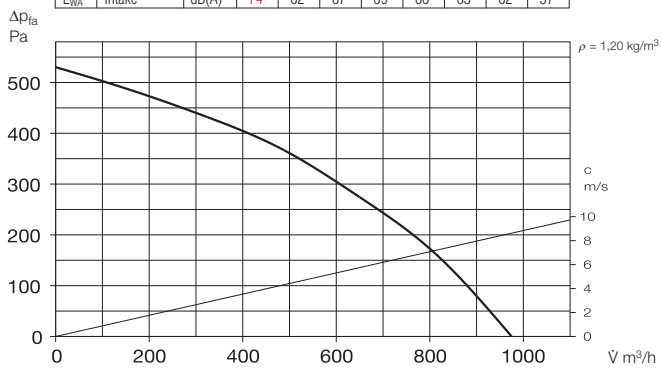


RRK 200

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 63	42	47	57	58	57	51	38
L _{WA} Intake		dB(A) 73	51	64	71	69	65	62	54

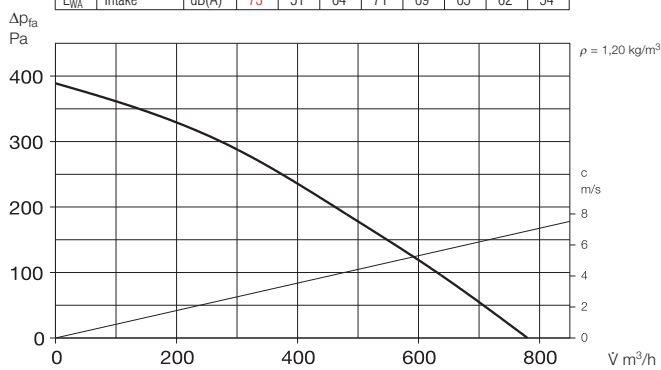

SVR 200 K


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		dB(A) 65	47	62	61	53	48	42	36
L _{WA} Intake		dB(A) 78	65	74	73	65	63	60	57
L _{WA} Exhaust		dB(A) 82	69	77	79	71	70	66	63

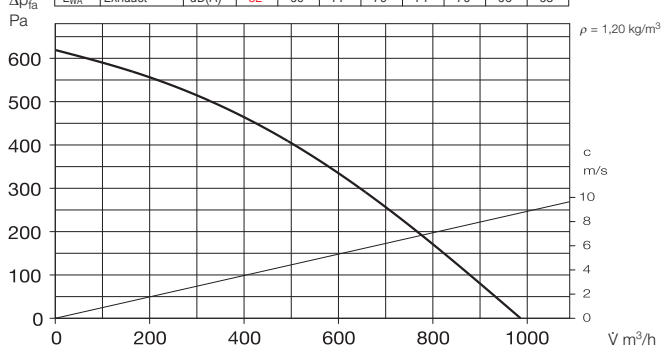

Accessories

Pipe clamp connectors

Type BM 200 Ref. no. 5078
A quick-fix method for connecting fans to ducting, reducing vibration transmission (1 kit = 2 pieces). When installing leave a little gap between fan and ducting.



Mounting feet for RR

Type MK 4 Ref. no. 5824

Mounting feet for RRK

Type MK 2 Ref. no. 5822


Made from galvanised steel sheet.



Gravity shutter

Type VK 200 Ref. no. 0758

Made from polymer, light grey.



Rain repellent grille

Type RAG 200 Ref. no. 0750

Made from polymer, light grey.

Guard

Type SGR 200 Ref. no. 5066

For intake and exhaust installation on fan, made from galvanised steel.



Backdraught shutter

Type RSK 200 Ref. no. 5074

Automatic, made from metal.



Flexible attenuator

Type FSD 200 Ref. no. 0679

Spigotted aluminium attenuator with 50 mm insulation. Length 1 m.



Air filter box

LFBR 200 G4 Ref. no. 8579

LFBR 200 F7 Ref. no. 8533

Air filter with large surface area to be installed in-line with ducting.



Electric heater batteries

EHR-R 1,2/200 1,2 kW No. 9436


EHR-R 2/200 2,0 kW No. 9437

EHR-R 5/200 5,0 kW No. 8711

– with integrated temp. control

EHR-R 5/200 TR 5,0 kW No. 5295

Room or duct sensor required (TFK/TFR, accessory).



Temperature control system for electric heater batteries EHR-R


Type EHS Ref. no. 5002



Warm water heater battery

Type WHR 200 Ref. no. 9482

Compact heat exchanger for in-line installation.



Temperature control system for warm water heater battery

Type WHST 300 T38 No. 8817



For medium to smaller air flow volumes against high resistances.

Specifically made for in-duct installation. High pressure characteristic to overcome resistances of bends, filters etc. Universal in application for domestic, commercial and industrial purposes.

Special features


- Less space required and simple site installation of the compact in line design.
- Its simplicity reduces site costs.
- Supply and exhaust air spigots fit all standard circular duct sizes.
- Power adjustment by 100% variable speed control.
- Installation in any position.
- Wide range of accessories.
- Aerodynamically optimized casing design.

Common features

- Motor**
Closed, ball bearing-mounted external rotor motor with humidity protection, insulation class F, for continuous operation, maintenance free and interference-free.
- Motor protection**
Automatically switches off and on again after cooling due to built-in thermal contacts with the winding wired in series.

RR

Market-leading series offering excellent value for money.
With energy saving mode as standard.




Dim. in mm

Specification RR

- Casing**
Robust casing from galvanised sheet steel for harsh operating conditions. Intake and exhaust Spigots on intake and exhaust fit standard ducts.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
Two-speed operation possible for Type RR 200 A using Type DS 2/2 (accessories).
Type DS 2/2 Ref. no. 1267
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
When installed in intake and exhaust ducting and rainwater penetration is prevented, the fan is rated IP 44.

RRK



Alternative in corrosion and impact resistant polymer casing.



Dim. in mm

Specification RRK

- Casing**
All components made from corrosion and impact resistant polymer. Six built-in guide vanes also increase the level of efficiency. Colour: Silver-grey.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
IP 44



Installation

Can be mounted in any position – horizontal, vertical or diagonal – suitable for supply and extract ventilation by correct installation. To minimise the effective noise level it is recommended that the fan is installed as remote as possible from the ventilated space.


Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Power consumption	Current full load	Current control	Wiring diagram	max. air flow temp. full load	temp. control	Weight net approx.	Transformer-speed controller 5-step	Electronic* speed controller, stepless flush / surface		
		\dot{V} m ³ /h	min ⁻¹	db(A) in 1 m	W	A	A	No.	+°C	+°C	kg	Type	Ref. no.	Type	Ref. no.
Type RR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44 (Type RR 250 C, IP 33)															
RR 250 A ¹⁾	5652	886 ¹⁾ /740	2580 ¹⁾ /1910	46	115 ¹⁾ /83	0.50 ¹⁾ /0.38	0.50	934.1	60	60	4.6	TSW 1,5	1495	ESU 1 / ESA 1	0236 / 0238
RR 250 C	5660	970	2750	45	145	0.63	0.78	508	70	60	5.0	TSW 1,5	1495	ESU 1 / ESA 1	0236 / 0238
Type RRK, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44															
RRK 250	5978	912	2450	53	115	0.50	0.50	508	50	40	3.9	TSW 1,5	1495	ESU 1 / ESA 1	0236 / 0238

¹⁾ Type with high speed; standard with additional energy-saving speed level (see performance diagram).

* In noise relevant cases transformer controller must be provided. An electronic controller can trigger a distracting magnetisation noise.


RR 250 A

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k	
L _{WA} Case breakout		dB(A)	54	30	34	47	52	47	44	38
L _{WA} Intake		dB(A)	74	60	67	67	69	68	64	55

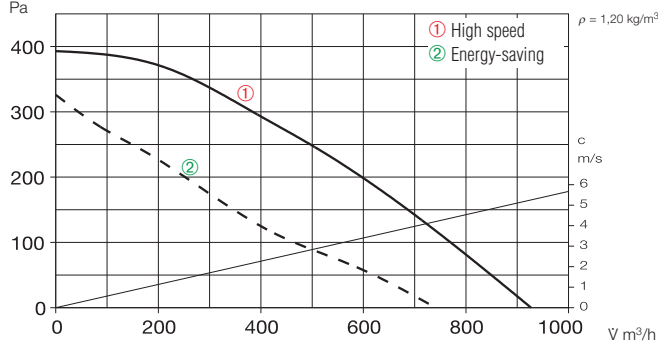


RR 250 C

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k	
L _{WA} Case breakout		dB(A)	53	31	42	46	49	46	43	38
L _{WA} Intake		dB(A)	75	60	67	67	70	66	64	66

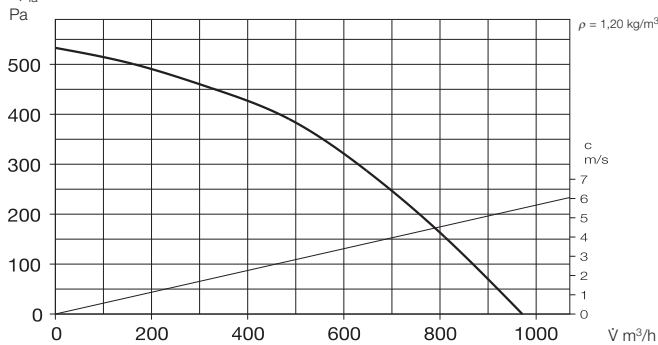

RRK 250

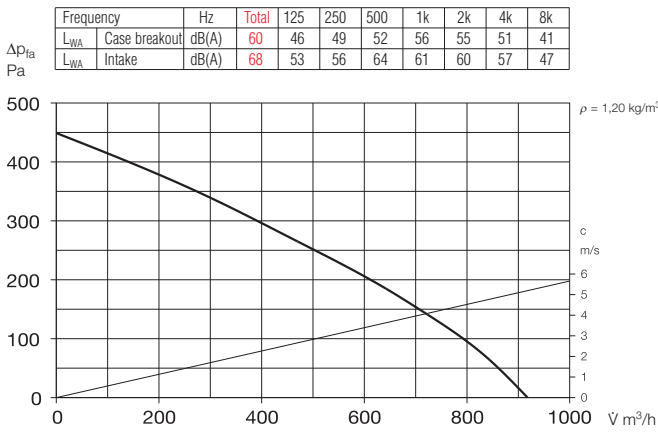

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for

- Sound level case breakout
- Sound level intake/exhaust

In addition, the case breakout and intake air noise figures are given as sound pressure levels at 1 metre (free field conditions) in the technical data table (see left page).

Note

	Page
Techn. description	296
Selection chart	297
Information for planning	10 on
Modular system	294


Accessory details

	Page
Filters, heater batteries and attenuators	421 on
Temperature control systems for heater batteries	427, 431 on
Flexible ventilation ducting, grilles, adaptors, roof terminations	487 on
Poppet valves	508 on
Speed controllers and switches	525 on

Accessories

Pipe clamp connectors

Type BM 250 Ref. no. 5079
A quick-fix method for connecting fans to ducting, reducing vibration transmission (1 kit = 2 pieces). When installing leave a little gap between fan and ducting.



Mounting feet for RR

Type MK 4 Ref. no. 5824

Mounting feet for RRK

Type MK 2 Ref. no. 5822


Made from galvanised steel sheet.



Gravity shutter

Type VK 250 Ref. no. 0759

Automatic made from polymer, light grey.



Rain repellent grille

Type RAG 250 Ref. no. 0751

Made from polymer, light grey.



Guard

Type SGR 250 Ref. no. 5067

For intake and exhaust installation on fan, made from galvanised steel.



Backdraught shutter

Type RSK 250 Ref. no. 5673

Automatic, made from metal.



Flexible attenuator

Type FSD 250 Ref. no. 0680

Spigotted aluminium attenuator with 50 mm insulation. Length 1 m.



Air filter box

LFBR 250 G4 Ref. no. 8580

LFBR 250 F7 Ref. no. 8534

Air filter with large surface area to be installed in-line with ducting.



Electric heater batteries

EHR-R 6/250 6,0 kW No. 8712

– with integrated temp. control

EHR-R 6/250 TR 6,0 kW No. 5296

Room or duct sensor required (TFK/TFR, accessory).



Temperature control system for electric heater batteries EHR-R


Type EHS Ref. no. 5002



Warm water heater battery

Type WHR 250 Ref. no. 9483

Compact heat exchanger for in-line installation.



Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319



For medium to smaller air flow volumes against high resistances.

Specifically made for in-duct installation. High pressure characteristic to overcome resistances of bends, filters etc. Universal in application for domestic, commercial and industrial purposes.

Special features


- Less space required and simple site installation of the compact in line design.
- Its simplicity reduces site costs.
- Supply and exhaust air spigots fit all standard circular duct sizes.
- Power adjustment by 100% variable speed control.
- Installation in any position.
- Wide range of accessories.
- Aerodynamically optimized casing design.

Common features

- Motor**
Closed, ball bearing-mounted external rotor motor with humidity protection, insulation class F, for continuous operation, maintenance free and interference-free.
- Motor protection**
Automatically switches off and on again after cooling due to built-in thermal contacts with the winding wired in series.

RR

Market-leading series offering excellent value for money.




Dim. in mm

Specification RR

- Casing**
Robust casing from galvanised sheet steel for harsh operating conditions. Intake and exhaust Spigots on intake and exhaust fit standard ducts.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
When installed in intake and exhaust ducting and rainwater penetration is prevented, the fan is rated IP 44.

RRK



Alternative in corrosion and impact resistant polymer casing.



Dim. in mm

Specification RRK

- Casing**
All components made from corrosion and impact resistant polymer. Six built-in guide vanes also increase the level of efficiency. Colour: Silver-grey.
- Electrical connection**
Terminal box (IP 54) located on outer casing.
- Speed control**
From 0 – 100% by means of electronic controller or step transformer (see table).
- Impeller**
Centrifugal impeller with backward curved polymer blades. Directly mounted to motor and dynamically balanced as a unit. Low-noise, highly efficient.
- Protection class**
IP 44



Installation


Can be mounted in any position – horizontal, vertical or diagonal – suitable for supply and extract ventilation by correct installation. To minimise the effective noise level it is recommended that the fan is installed as remote as possible from the ventilated space.

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Power consumption	Current		Wiring diagram	max. air flow temp.		Weight net approx.	Transformer-speed controller 5-step		Electronic* speed controller, stepless flush / surface	
						full load	control		full load	control		Type	Ref. no.	Type	Ref. no.
		\dot{V} m ³ /h	min ⁻¹	db(A) in 1 m	W	A	A	No.	+°C	+°C	kg	Type	Ref. no.	Type	Ref. no.
Type RR, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44															
RR 315	5920	1260	2660	46	200	0.87	0.97	508	70	60	6.1	TSW 1,5	1495	ESU 3 / ESA 3	0237 / 0239
Type RRK, 1 phase motor, 230 V, 50 Hz, capacitor motor, IP 44															
RRK 315	5979	1060	2690	48	170	0.75	0.97	508	70	60	5.7	TSW 1,5	1495	ESU 3 / ESA 3	0237 / 0239

* In noise relevant cases transformer controller must be provided. An electronic controller can trigger a distracting magnetisation noise.


RR 315

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k	
L _{WA} Case breakout		dB(A)	54	40	45	46	48	49	46	37
L _{WA} Intake		dB(A)	76	58	65	66	67	70	70	64

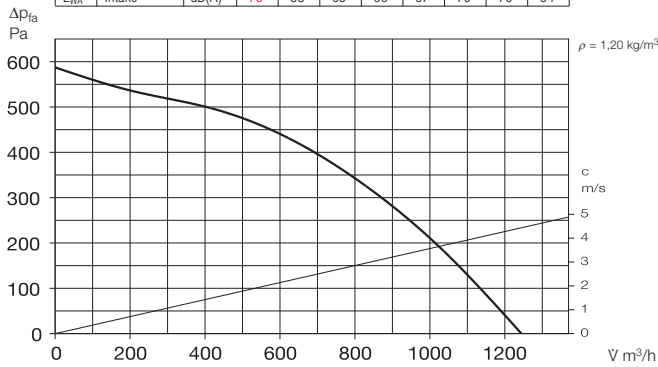

RRK 315

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k	
L _{WA} Case breakout		dB(A)	55	40	45	50	50	47	43	34
L _{WA} Intake		dB(A)	72	45	63	64	68	64	63	57

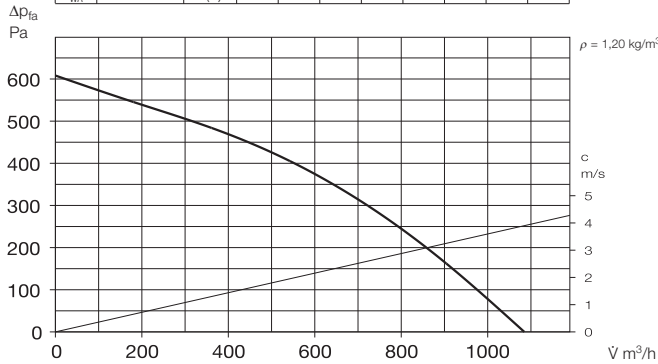

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for

- Sound level case breakout
- Sound level intake/exhaust

In addition, the case breakout and intake air noise figures are given as sound pressure levels at 1 metre (free field conditions) in the technical data table (see left page).

Note

Page
Techn. description
Selection chart
Information for planning
Modular system


Accessory details

Page
Filters, heater batteries and attenuators
Temperature control systems for heater batteries
Flexible ventilation ducting, grilles, adaptors, roof terminations
Poppet valves
Speed controllers and switches

Accessories

Pipe clamp connectors

Type BM 315 Ref. no. 5080
A quick-fix method for connecting fans to ducting, reducing vibration transmission (1 kit = 2 pieces). When installing leave a little gap between fan and ducting.



Mounting feet for RR

Type MK 4 Ref. no. 5824

Mounting feet for RRK


Type MK 3 Ref. no. 5823
Made from galvanised steel sheet.



Gravity shutter

Type VK 315 Ref. no. 0760

Automatic made from polymer, light grey.



Rain repellent grille

Type RAG 315 Ref. no. 0752

Made from polymer, light grey.



Guard

Type SGR 315 Ref. no. 5068

For intake and exhaust installation on fan, made from galvanised steel.



Backdraught shutter

Type RSK 315 Ref. no. 5674

Automatic, made from metal.



Flexible attenuator

Type FSD 315 Ref. no. 0681

Spigotted aluminium attenuator with 50 mm insulation. Length 1 m.



Air filter box

LFBR 315 G4 Ref. no. 8581

LFBR 315 F7 Ref. no. 8535

Air filter with large surface area to be installed in-line with ducting.



Electric heater batteries

EHR-R 6/315 6,0 kW No. 8713

– with integrated temp. control

EHR-R 6/315 TR 6,0 kW No. 5301

Room or duct sensor required (TFK/TFR, accessory).



Temperature control system for electric heater batteries EHR-R


Type EHS Ref. no. 5002



Warm water heater battery

Type WHR 315 Ref. no. 9484

Compact heat exchanger for in-line installation.



Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319

